


# LED12V<sup>(DC)</sup>

## Flexible Leiterplatte (flexible PCB) vertical

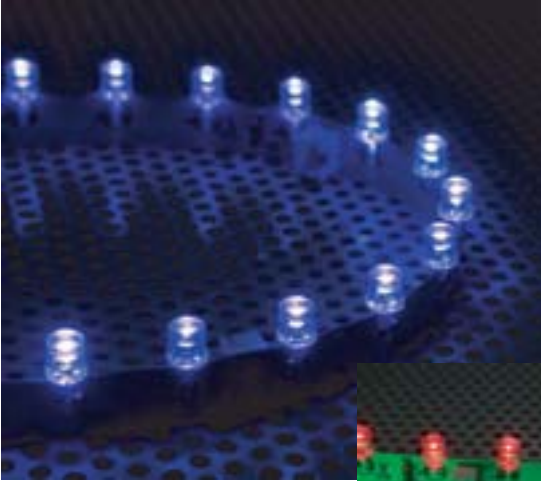

⊙ 50	551-201-50	12 V(dc)	1,1 W	8 x 305 mm	18 radial LED white
⊙ 54	551-201-54	12 V(dc)	1,1 W	8 x 305 mm	18 radial LED blue
● 55	551-201-55	12 V(dc)	1,1 W	8 x 305 mm	18 radial LED red
● 58	551-201-58	12 V(dc)	1,1 W	8 x 305 mm	18 radial LED yellow
● 59	551-201-59	12 V(dc)	1,1W	8 x 305 mm	15 radial LED green


minimaler Biegeradius (minimal bending radius) vertical 50 mm  
 Jede Leiterplatte wird mit 2 Befestigungs-Clips und einem Einspeisekabel geliefert.

Each PCB will be delivered with 2 fixing clips and 1 input cable

### Zubehör (accessories)



551-202 Befestigungs-Clip (fixing clip)

551-203 Verlängerungsleitung (extension cable)

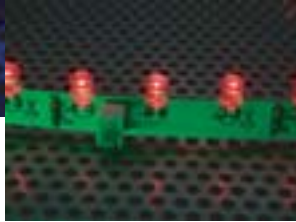

## FLEXIBEL

Biegeradius minimal 5cm

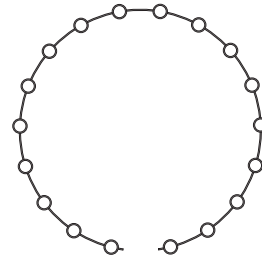

## Flexible Leiterplatte (flexible PCB) horizontal

⊙ 50	551-206-50	12 V(dc)	2,4 W	8 x 500 mm	30 SMD white
⊙ 54	551-206-54	12 V(dc)	2,4 W	8 x 500 mm	30 SMD blue
● 55	551-206-55	12 V(dc)	4,8 W	8 x 500 mm	30 SMD red
● 58	551-206-58	12 V(dc)	4,8 W	8 x 500 mm	30 SMD yellow
● 59	551-206-59	12 V(dc)	2,4 W	8 x 500 mm	30 SMD green

minimaler Biegeradius (minimal bending radius) horizontal 20 mm

Jede Leiterplatte wird mit einem Einspeisekabel L=180mm geliefert.  
 Each PCB will be delivered with an input cable of 180mm.

## FLEXIBEL

Biegeradius minimal 2cm

