


LED power 700



prim. [input] 195-260V
 Frequenz 50 - 60Hz
 sec. [output] 700mA constant
 Abmessung [dimension] 52x26x22mm
 Überlastschutz [overload-protection]
 Kurzschlußschutz [short-circuit-protection]
 Für den Einsatz von 1 LUXEON Star 3 W
 [Suitable to supply 1 LUXEON Star 3W]

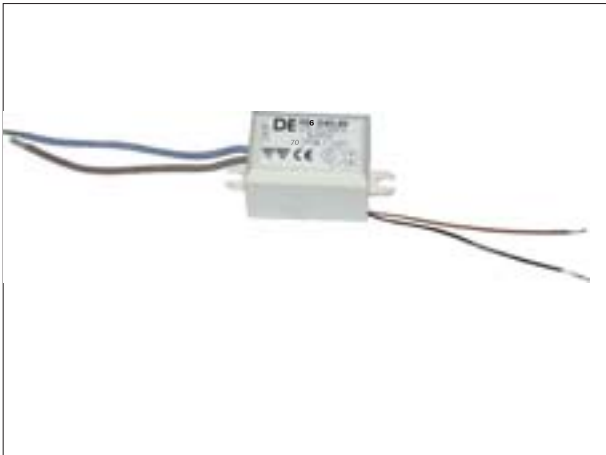

556-040-50



prim. [input] 95 - 260V
 Frequenz 50 - 60Hz
 sec. [output] 700mA constant
 Abmessung [dimension] 101x42x20mm
 Überlastschutz [overload-protection]
 Kurzschlußschutz [short-circuit-protection]
 Schnittstelle für Potentiometer [interface for potentiometer]
 Für den Einsatz von 1-3 LUXEON Star 3 W
 [suitable to supply 1-3 LUXEON Star 3 W]



556-024-50

Potentiometer 50 Ohm 550-099-50



prim. [input] 230V
 Frequenz 50 - 60Hz
 sec. [output] 700mA constant
 Abmessung [dimension] 104x66x30 mm
 Nennleistung [power] nominal 1-6 LED 3W (28 V)
 Für den Einsatz von 1-6 LUXEON Star 3 W
 [suitable to supply 1-6 LUXEON Star 3 W]

556-044-50



Elektronische Stromversorgung für LUXEON Star 3W; prim. 210 - 250 V (50-60Hz); sek. 700mA constant; Dimmschnittstelle (PWM), Dimmbereich 0-100%, Schnittstelle 1-10V, **dimmbar** über Steuersignal 1-10V; Kurzschluß- und Temperatursicherung; zum Betrieb von 1 - 5 LUXEON Star 3W; (LxBxH) 103x67x30mm.

[Electronic power supply for LUXEON Star 3 W; prim. 210 - 250 V (50-60Hz); sec. 700 mA constant; dimming interface (PWM), range 0-100%, interface 1-10V, **dimmbable** via 1-10V signal; short- and open circuit protected; suitable to supply 1-5 LUXEON Star 3W); (LxBxH) 103x67x30mm.]

556-045-50