


LED power 100



prim. [input] : 95 - 260Vac / 50 - 60Hz
 130 - 375 Vdc
 sec. [output] : 700mA constant
 Nennleistung [power] : 1 - 3 Dioden 3W
 Abmessungen [dimensions] : ØxH 49x20mm
 Überlastschutz [overload protection]
 Kurzschlußschutz [short circuit protection]
 Schnittstelle für Potentiometer [interface for potentiometer]
 Für den Einsatz von 1-3 Luxeon 3W
 [suitable to supply 1-3 Luxeon 3W]



556-028-50

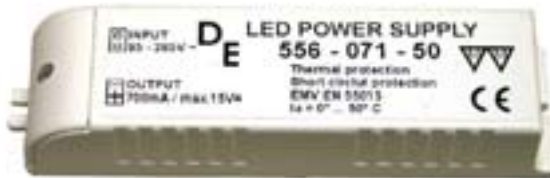

prim. [input] : 95 - 260Vac / 50 - 60Hz
 130 - 375 Vdc
 sec. [output] : 700mA constant
 zum Betrieb von 1 - 3 LED LUXEON 3W [suitable to
 supply max. 3 LUXEON 3W], Abmessungen [dimensions]
 120x32x22mm, thermischer Schutz [thermal protection],
 Kurzschlußschutz [short-circuit-protection]



556-071-50



prim. [input] : 95 - 260Vac / 50 - 60Hz
 130 - 375 Vdc
 sec. [output] : 700mA constant
 zum Betrieb von 1 - 3 LED LUXEON 3W [suitable to
 supply max. 3 LUXEON 3W], Abmessungen [dimensions]
 73x30x41mm, thermischer Schutz [thermal protection],
 Kurzschlußschutz [short-circuit-protection]



556-027-51