




502-471

19  
40  
50  
51  
67  
85  
89

12 V	Gx5,3	QR-CBC51 max. 50 W
	IP 20	 85
 75	 70	502-990 502-991
<b>CE</b>	30°	

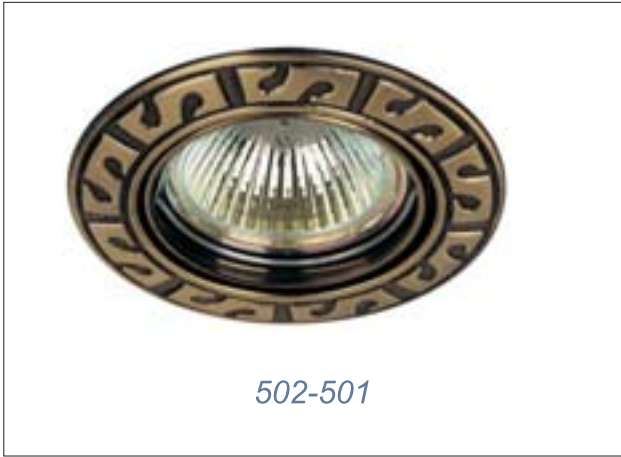

502-501

11  
40

12 V	Gx5,3	QR-CBC51 max. 50 W
	IP 20	 85
 75	 70	502-990 502-991
<b>CE</b>	30°	



502-499

19  
40  
50  
51  
67  
85  
89  
91

12 V	Gx5,3	QR-CBC51 max. 50 W
	IP 20	 110x85
 75	 70	502-990 502-991
<b>CE</b>	30° oval	



502-500

19  
40  
50  
51  
67  
85  
89  
91

12 V	Gx5,3	QR-CBC51 max. 50 W
	IP 20	 108x85
 75	 70	502-990 502-991
<b>CE</b>	30° Tropfenform (drop-form)	